

LIBERTY

DUAL-FUNCTION SOUND SYSTEM

MADE IN THE USA!

Reach crowds of 2,000+


117 dB of clear sound

Features heavy-duty,
lead-acid batteries
& built-in charger

Two universal mic input jacks

Speech projection mode
provides crystal-clear
voice projection

Clear and powerful sound,
thanks to an 8-inch weather
resistant woofer and
constant-directivity titanium
dome compression driver in
tuned enclosure

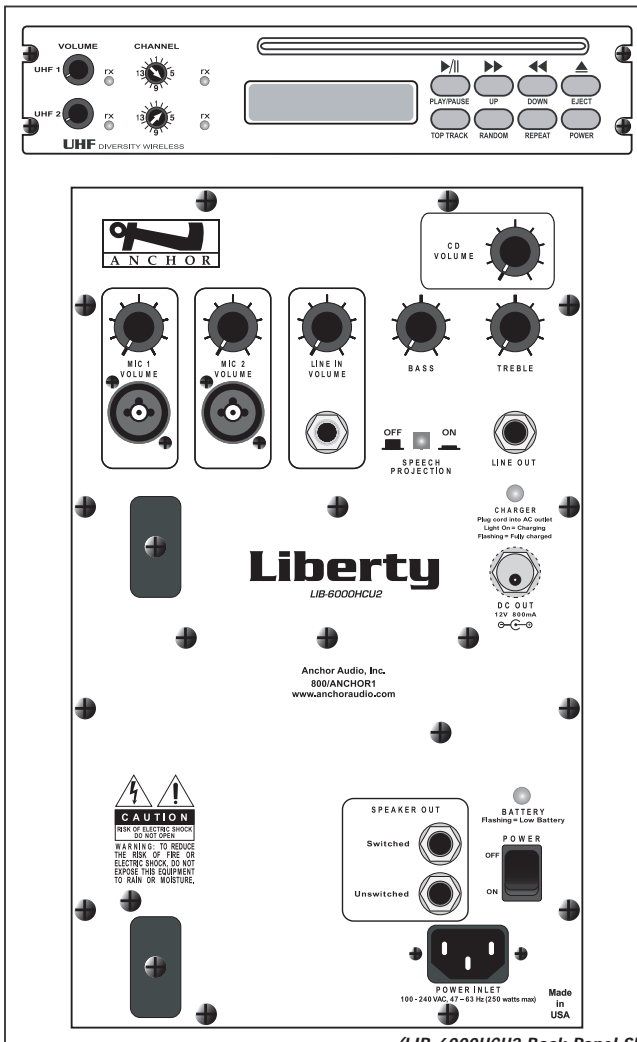

(LIB-6000HCU2 Back Panel Shown)

6-YEAR WARRANTY!

Now featuring 16 channel
UHF diversity wireless by
Anchor Audio

True AC/DC

110/220 power supply

Runs 10+ hours on a charge

New improved CD player
w/ rugged mechanism, blue
back-lit display &
bar graph level display

Up to 2 wireless receivers
with built-in CD player

Tough UV treated
fade resistant case

Remarkably durable
injection-molded case

Improved "limiter" circuitry
reduces distortion &
increases intelligibility

Integrated circuit amplifier
w/ short circuit & thermal
overload protection

External speaker output
powers optional Liberty
companion speaker

Daisy-chain ready: Connect
powered Liberty's together
for expanded coverage

UHF WIRELESS

WH-6000

Handheld wireless microphone/
transmitter

WB-6000

Wireless body-pack transmitter

Microphone options include:

Over-the-Ear / EM-60,
Lapel / LM-60, Collar / CM-60
& Headband / HBM-60

ACCESSORIES

LIB-6001

Unpowered companion speaker

FL-4500

Admiral lectern

MIC-90

Professional dynamic, cardioid
pattern handheld mic

SS-550

Heavy-duty speaker stand

NL-6000

Storage cover

HC-1650L/X

Custom traveling hard case

SC-50

50' speaker cable for LIB-6001

MODELS

LIB-6000H

Battery powered sound system
w/ built-in charger & heavy-duty
batteries installed

LIB-6000HC

W/ heavy-duty batteries &
CD player installed

LIB-6000HU1

W/ heavy-duty batteries &
1 wireless receiver installed

LIB-6000HU2

W/ heavy-duty batteries &
2 wireless receivers installed

LIB-6000HCU1

W/ heavy-duty batteries,
CD player & 1 wireless
receiver installed

LIB-6000HCU2

W/ heavy-duty batteries,
CD player & 2 wireless
receivers installed

SPECIFICATIONS

LIB-6000H

Rated power output:	50 watts
Max SPL @ rated power	
Projection mode:	117 dB
Music mode:	107 dB
Heavy Duty Battery (two):	12 volt rechargeable, 9.0 AH
Frequency response	
Music mode:	60 Hz - 15 kHz \pm 3 dB
Projection mode:	+10 dB from 1.5k - 12 kHz
Sensitivity for rated output	
Lo-Z Microphone:	-52 dBV (2.5 mVrms)
Hi-Z Microphone:	-43 dBV (7.5 mVrms)
Line:	-14 dBV (200 mVrms)
Inputs	
Lo-Z Microphone:	balanced, phantom powered, XLR
Hi-Z Microphone:	unbalanced, 1/4"-phone
Line:	Hi-Z, unbalanced, 1/4"-phone
Line output (post fader):	buffered, 600 Ω , 1/4"-phone
AC power requirements:	90 - 264Vac, 50/60 Hz, 50W Max
Dimensions (HWD):	22.5 x 13 x 10", 57 x 33 x 26 cm
Weight:	44 pounds, 20 Kg.

Specifications subject to change without notice.

0800-SOUNDS (NZ) 1-800-606-550 (AU)



customerservice@blackboxav.com